



DIMENSIONS:

A	3.750" ±0.063
B	2.690" ±0.125
C	3.125" ±0.063
D	3.125" ±0.063
E	2.250" ±0.063
F	2.813" ±0.063
G	0.203" X 0.375" ±0.015

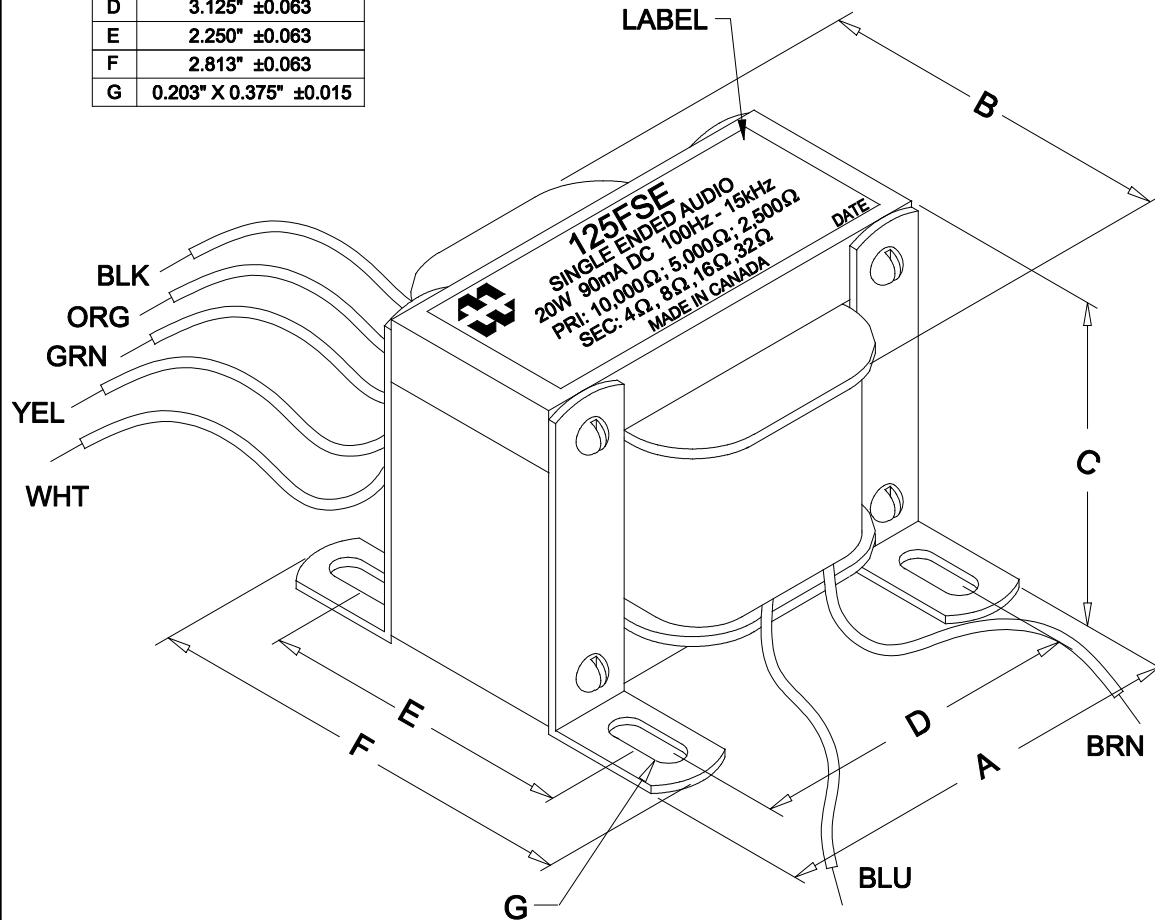

NOTE: ALL LEADS 12.0" OUT MIN.

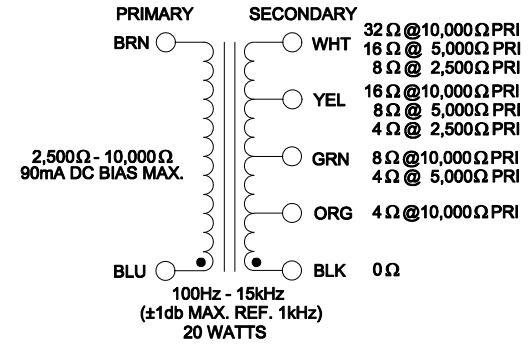

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
Iex	@ 250V, 100Hz, BLU - BRN	20mA - 30mA
Sec. N.L.V	@ 223.6V, 100Hz, BLU - BRN	
	BLK - ORG =	4.490V ±2%
	BLK - GRN =	6.490V ±2%
	BLK - YEL =	9.180V ±2%
	BLK - WHT =	12.98V ±2%
DCR	@ 20°C, BLU - BRN =	101.6 Ω ±20%
	@ 20°C, BLK - WHT =	0.345 Ω ±20%
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 10/03/17	MANUFACTURING™ 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: SINGLE ENDED	DWG. NO.
			DATE: 10/03/17	APP'D. BY:	AUDIO TRANSFORMER	125FSE
				DIMENSIONS: IN(X) MM()		

PH # (519) 886-6181
FAX # (519) 886-9540